G3 ThermoProX® 1.5 Gallon Brewers



TPX2S63A3100 G3 Single 1.5 Gallon Brewer (Dispenser sold separately)



TPX2T10A3100G3 Twin 1.5 Gallon Brewer (Dispensers sold separately)

Features

G3 Digital control module provides precise control over all aspects of brewing in an intuitive, easy-to-operate system.

Pre-Set Global Recipes at the Touch of a Single Button – No complex equipment required.

Stainless-steel ThermoPro® vacuum-sealed servers keep coffee fresh, hot and flavorful.

Centrally located hot water spout for instant hot beverages and other hot water needs.

Recommended Dispensers (Sold Separately)




TXSG1501S600 1.5 Gal. Thermal Dispenser




TFT15G1.5 Gal. Thermal
FreshTrac Dispenser



G3 ThermoProX® 1.5 Gallon Brewers

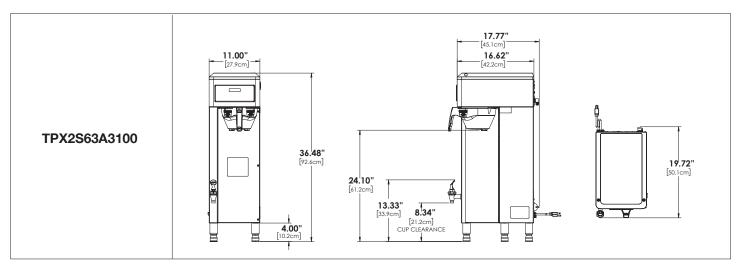

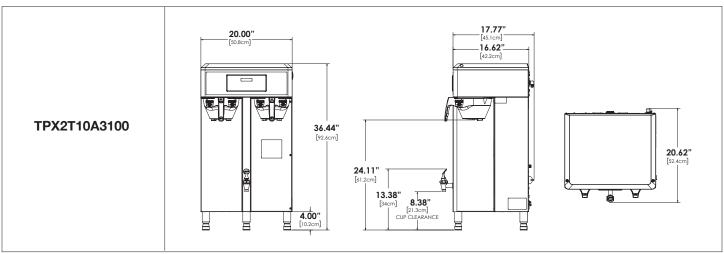

Dimensions

MODEL#	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWED FILL WEIGHT	BREWED G/HR	
TPX2S63A3100	G3 ThermoPro® Single 1.5 Gallon Brewer	36.48" x 11.00" x 19.72"	77.2 lbs.	4.5/12.0	
TPX2T10A3100	G3 ThermoPro® Twin 1.5 Gallon Brewer	36.44" x 20.00" x 20.62"	132.6 lbs.	15.0/21.0	

Utility Requirements		ELECTRICAL				WATER					
MODEL#	PHASE	VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MINIMUM FLOW RATE	TANK VOL.
TPX263A3100	1 PH	120/220V	15.0/12.7A	2 X 1600W	2W/3W + G	1800/2800W	50/60Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal
TPX2T10A3100	1 PH	220V	23.0/34.5A	3 X 2500W	3W + G	5100/7600W	50/60Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov